

DPSSL-XP series

Compact diode-pumped solid-state lasers with integrated controller electronics - up to 500 mW output power



- ⦿ Large variety of wavelengths 473 nm to 640 nm
- ⦿ Reliable and robust
- ⦿ Maintenance free and compact design
- ⦿ Control software and commandset
- ⦿ Customization on request



Compact diode-pumped solid-state lasers with integrated controller electronics

LASOS® DPSSL-XP series

The LASOS DPSSL-XP is our latest release of compact diode-pumped solid-state lasers. It combines the eXperience of more than 20 years solid state laser development and manufacturing.

DPSSL-XP lasers offer excellent beam quality in a variety of wavelengths based on the latest progress in solid state laser technology. The new laser series makes OEM integration even simpler and is also ideally suited for flexible laboratory operation. All necessary control electronics are now fully integrated.



Specifications

Wavelengths (nm)	Standard: 473, 532, 543, 556, 561, 594, 640 On request: 552, 607
Wavelength stability (8 h)	±2 pm
Spectral linewidth ¹	< 1 MHz
Output power	up to 500 mW depending on wavelength
Output power stability within 8 h	±2.0 %
Noise 30 Hz-10 MHz (%)	< 0.5 rms ²
Warm up period	< 10 min
Beam Quality M ² (TEM00)	< 1.2
Beam waist diameter (1/e ²)	0.7 mm
Beam ellipticity	0.85 -1.15
Pointing stability	< 6 μrad K ⁻¹
Polarization ratio	≥ 200:1
Operating voltage	12 V


¹ Except 594 nm and 640 nm >200 mW
² 594, 607, 640 nm <2 %

Areas of application:

- ⊙ Spectroscopy
- ⊙ Interferometry
- ⊙ Confocal and fluorescence microscopy
- ⊙ Bioanalytical research
- ⊙ Particle measurements
- ⊙ Metrology
- ⊙ Holography
- ⊙ Quantum-imaging
- ⊙ Industrial measurements
- ⊙ Science and education


Wavelengths

LASOS DPSSL-XP series

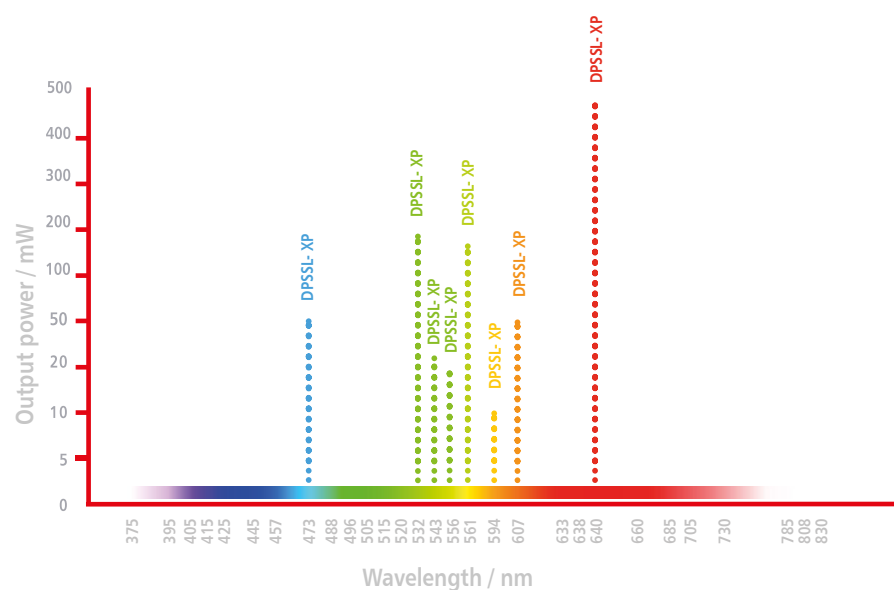


Drawings


LASOS DPSSL-XP series free beam

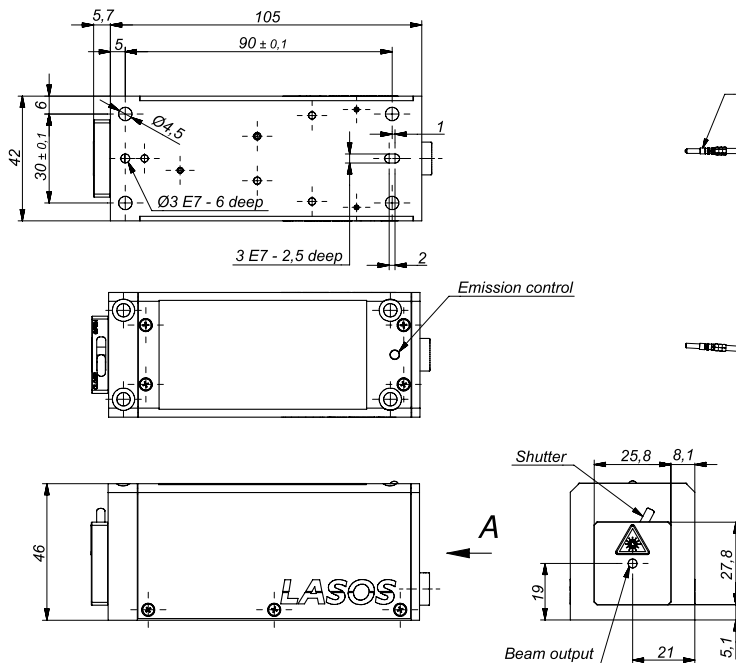

LASOS DPSSL-XP series fiber coupled

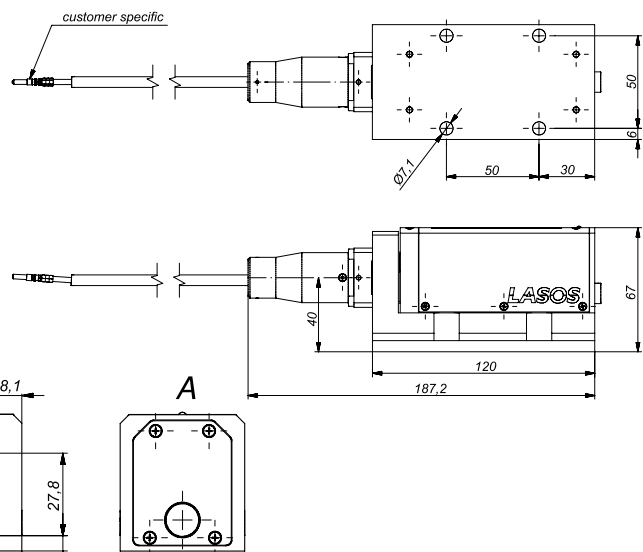


Accessories

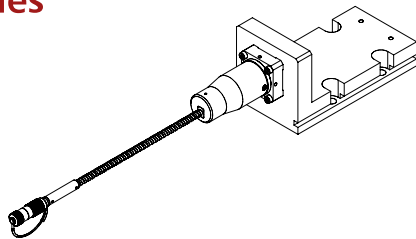


Fiber coupling

- ◉ Fiber coupling: single-mode, polarization maintaining
- ◉ Coupling efficiency up to 80%




Shutter

- ◉ For stand alone lasers
- ◉ For free beam lasers safety



Switch Box XP

- ◉ Interface: USB 2.0 and RS232
- ◉ Operating voltage: 12 VDC
- ◉ Power consumption: 42 W



Heat sink LHA 1202

- ◉ Operating voltage: 12 VDC
- ◉ Operating current: 200 mA
- ◉ Recommended for all lasers

Worldwide Representatives



- | | | | |
|---|--|---|--|
| <p>1 Benelux
 Te Lintelo Systems BV
 www.tlsbv.nl
 sales@tlsbv.nl</p> | <p>2 Italy
 Laser Optronic Srl
 www.laseroptronic.it
 lop@laseroptronic.it</p> | <p>3 Baltic States
 Photonic Solution UAB
 www.photonicsolutions.eu
 info@photonicsolutions.eu</p> | <p>4 France / Spain
 Acal BFI France SAS
 www.acalbfi.com
 sales-fr@acalbfi.fr</p> |
| <p>5 UK / Ireland
 Lambda Photometrics Ltd.
 www.lambdaphoto.co.uk
 contact@lambda.co.uk</p> | <p>6 Poland
 Lambda System
 www.lambdasystem.pl
 office@lambdasystem.pl</p> | <p>7 Scandinavia
 Tillquist Group AB
 www.tillquist.com
 info@tillquist.com</p> | <p>8 Czech Republic
 OptiXs, s.r.o.
 www.optixs.cz
 info@optixs.cz</p> |
| <p>9 North-America (Gas Laser)
 RPMC Lasers Inc
 www.rpmclasers.com
 info@rpmclasers.com</p> | <p>10 USA / Canada / Mexico / South-America
 LASOS Lasertechnik GmbH
 www.lasos.com
 sales@lasos.com</p> | <p>11 China
 Beijing Haike Sirui Optoelectrics Instr. Corp.
 bjhksr.com
 sales@bjhksr.com</p> | <p>12 Japan
 Japan Laser Corporation
 japanlaser.co.jp
 jl@japanlaser.co.jp</p> |
| <p>13 Taiwan
 Tayhwa Technology Co., Ltd
 tayhwa.com.tw
 tayhwa@tayhwa.com.tw</p> | <p>14 South Korea
 Dongwoo Optron Co., Ltd
 optron.co.kr
 ok@optron.kr</p> | <p>15 Singapore / South East Asia
 Simple Technologies Private Limited
 simplesg.com
 sgadmin2@simplesg.com</p> | <p>16 India
 Photonics Marketing Company
 photonics-marketing.com
 info@photonics-marketing.com</p> |

LASOS

For worldwide photonics

LASOS Lasertechnik GmbH

Franz-Loewen-Str. 2

07745 Jena Germany



lasos.com